


# MISCO. Accessories

DUAL VOLTAGE, 5 WATT TRANSFORMER

PART #: 5T2570

Model 5T2570 is a 5 watt line matching transformer for use in constant voltage sound reinforcement systems. This unit has dual voltage capability and has an insertion loss that does not exceed 1 dB with a frequency response of +/- 1.5 dB from 100 - 10KHz. The primary taps are 5, 2.5, 1, 0.5, and 0.25 watts. The secondary impedance is 8 ohms. See detailed specifications below.

- 5 Watt
- 25 & 70 Volt
- 8 Ohm Secondary Impedance
- 5, 2.5, 1, 0.5 0.25 Primary Taps
- +/- 1 dB from 100 - 10KHz Frequency Response

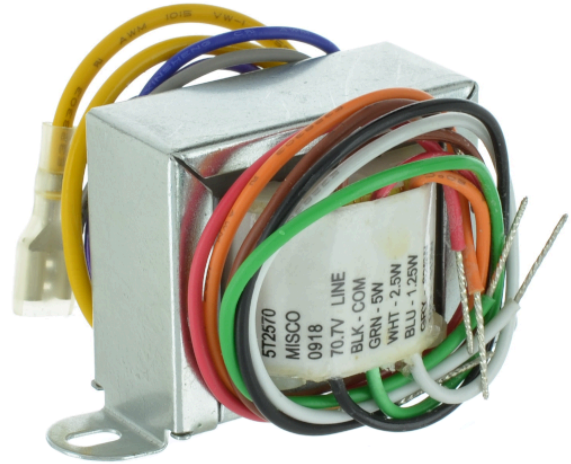

## Primary Specifications

- 5 Watt
- 25 & 70 Volt
- 8 Ohm Secondary Impedance
- 5, 2.5, 1, 0.5 0.25 Primary Taps
- +/- 1 dB from 100 - 10KHz Frequency Response