


# Specification Sheet

Model # FC32WP-E

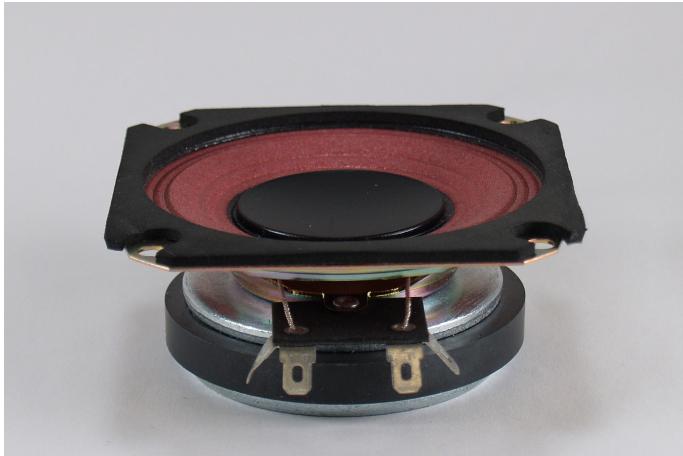

# MISCO®

## Key Features:

- 3.5" (87 mm), 8 ohm
- Voice Range, 6 watt
- Ferrite magnet, red acrylic treated cloth cone;

## Product Specifications & Parameters

### Primary Specifications

Speakers Environment	Outdoor
RoHS Compliant	No

### Technical Specifications

		Units of Measure
Nominal Basket Diameter	3.5	inch
	87.0	mm
Rated Impedance	8	ohms
Rated Power	6.0	Watts
Program Power	12	Watts
Frequency Range	300 - 4500	Hz
Sensitivity (2.83 V input measured at 1 Meter)	90	dB SPL
Voice Coil Diameter	0.8 / 20.3	inch / mm
Magnet Weight	4.8 / 136	oz / gr
Transformer		


### Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	432	Hz
D.C. Resistance (Re)	6.0	ohms
Mechanical Q (Qms)	4.9	
Electrical Q (Qes)	3.11	
Total Q (Qts)	1.9	
Compliance Equivalent Volume (Vas)		ltr
BL Product (BL)		T-M
Maximum Linear Excursion (Xmax)	0.3	mm
Surface Area of Cone (Sd)		cm <sup>2</sup>
Moving Mass (Mmd)		g

### Material Descriptions

Basket	Stamped Steel
Terminal Size	0.205 X 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Aluminum
Cone	Red Acrylic Treated Cloth
Cone Edge	Red Acrylic Treated Cloth
Dust Cap	Plastic

## Sensitivity / Frequency

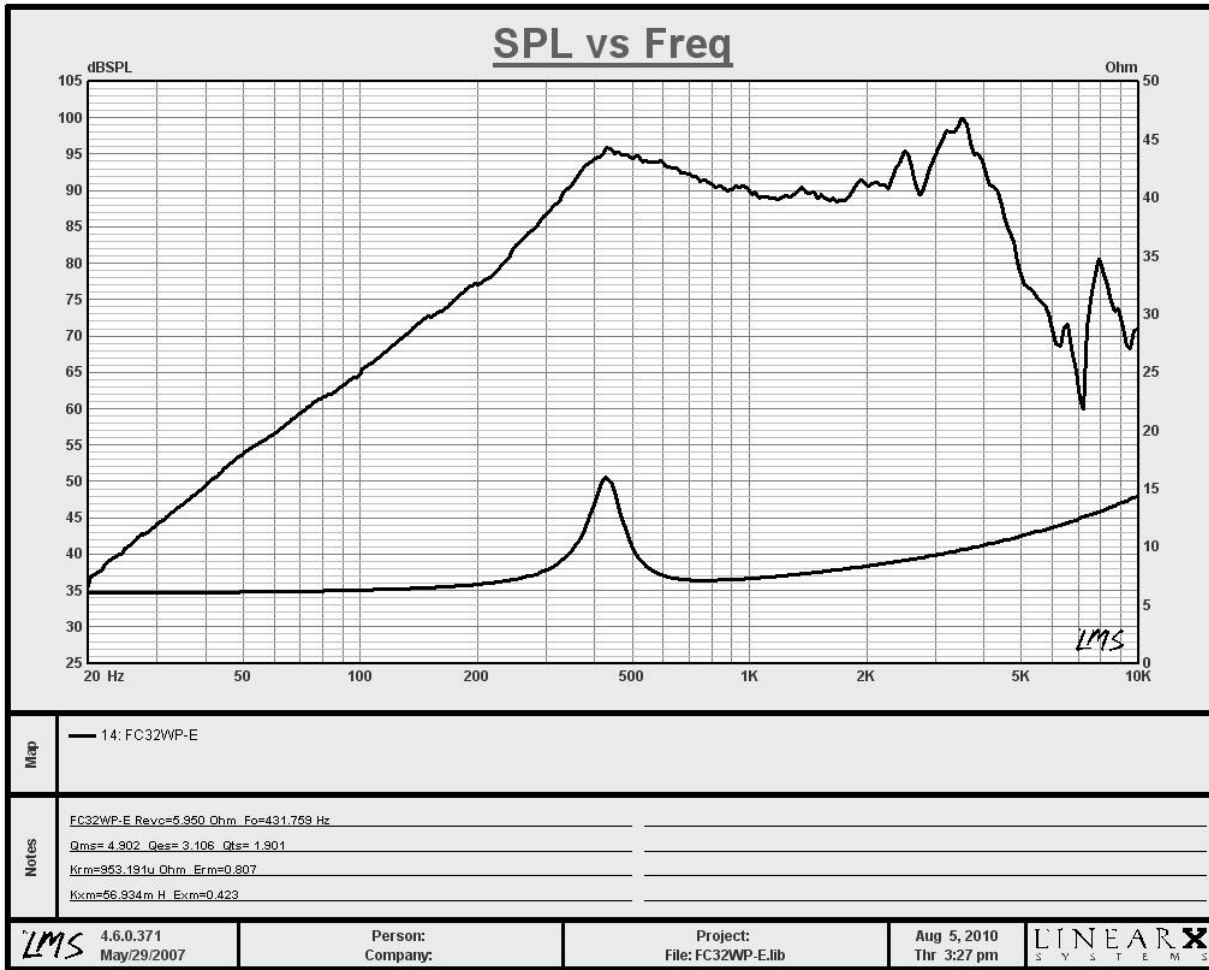

## Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	3.5 in.	+/- 0.020"
CD	Cutout Diameter	3.2 in.	+/- 0.020"
MG	Magnet Diameter	2.8 in.	+/- 0.050"
HD	Hole Diameter	0.2 in.	+/- 0.010"
MD	Mounting Diameter	3.9 in.	+/- 0.010"
ID	Internal Depth	1.3 in.	+/- 0.025"
FT	Flange Thickness	0.1 in.	+/- 0.050"
NW	Net Weight	426.0 g	

