


The AX-1364-M is a 6-inch integrated transit speaker, 70-volt transformer, and bushed aluminum grille specially designed for railcar applications. This model's custom-mounted terminal strip allows multiple connection methods to best suit a system's electrical configuration.

- Voice range speaker
- 6-inch (152 mm) basket diameter
- 12 watts, 8 ohm
- 4-watt transformer taps 1, 2, and 4 watts
- Ferrite magnet, acrylic treated paper cone
- Bushed aluminum grille

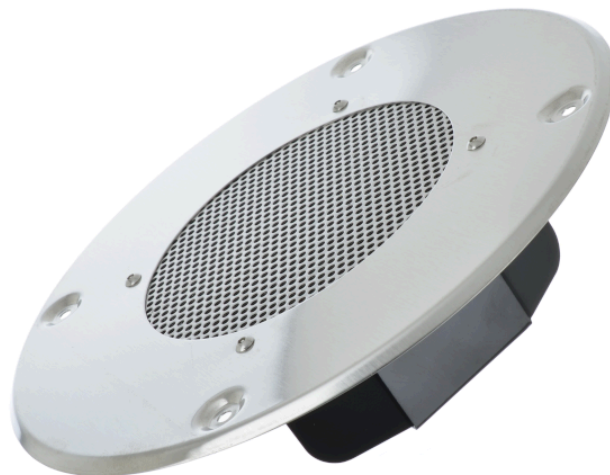

#### Primary Specifications

<b>Size, Nominal (inch &amp; mm)</b>	6" (152 mm)
<b>Rated Impedance (<math>\Omega</math>)</b>	8
<b>Frequency Range (Hz)</b>	80 - 8, 500
<b>Resonant Frequency (Fs) (Hz) +/- 15%</b>	120

### More Specifications

Application	Indoor, Transit, Voice Communications
RoHS Compliant	No
DC Resistance (Re) ( $\Omega$ )	8
Program Power (W)	12

### Small Signal Parameters

Nominal Impedance (Z) ( $\Omega$ )	8
DC Resistance (Re) ( $\Omega$ )	8
Resonant Frequency (Fs) (Hz) +/- 15%	120
Total Q Factor (Qts)	1.50

### Material Descriptions

Basket Type	Stamped steel
Magnet Material	Ferrite
Magnet Weight (g)	136.08
Cone Body Material	Treated paper
Cone Surround Material	Treated cloth

