

Specification Sheet

Model # JC62WP-4A



MISCO®

Key Features:

- 6.5" (165 mm), 4 ohm
- Full Range, 15 watts
- Ferrite magnet, black acrylic treated cloth cone;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Outdoor
RoHS Compliant	No

Technical Specifications

		Units of Measure
Nominal Basket Diameter	6.5	inch
	165.0	mm
Rated Impedance	4	ohms
Rated Power	15.0	Watts
Program Power	30	Watts
Frequency Range	90 - 8000	Hz
Sensitivity (2.83 V input measured at 1 Meter)	93	dB SPL
Voice Coil Diameter	1.0 / 25.4	inch / mm
Magnet Weight	10.0 / 284	oz / gr
Transformer		


Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	121	Hz
D.C. Resistance (Re)	3.8	ohms
Mechanical Q (Qms)	6.4	
Electrical Q (Qes)	0.83	
Total Q (Qts)	0.73	
Compliance Equivalent Volume (Vas)	7.0	ltr
BL Product (BL)	4.7	T-M
Maximum Linear Excursion (Xmax)	1.5	mm
Surface Area of Cone (Sd)	133.0	cm ²
Moving Mass (Mmd)		g

Material Descriptions

Basket	Stamped Steel
Terminal Size	0.205 x 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Kapton
Cone	Black Acrylic Treated Cloth
Cone Edge	Black Acrylic Treated Cloth
Dust Cap	Black Acrylic Treated Cloth

Sensitivity / Frequency

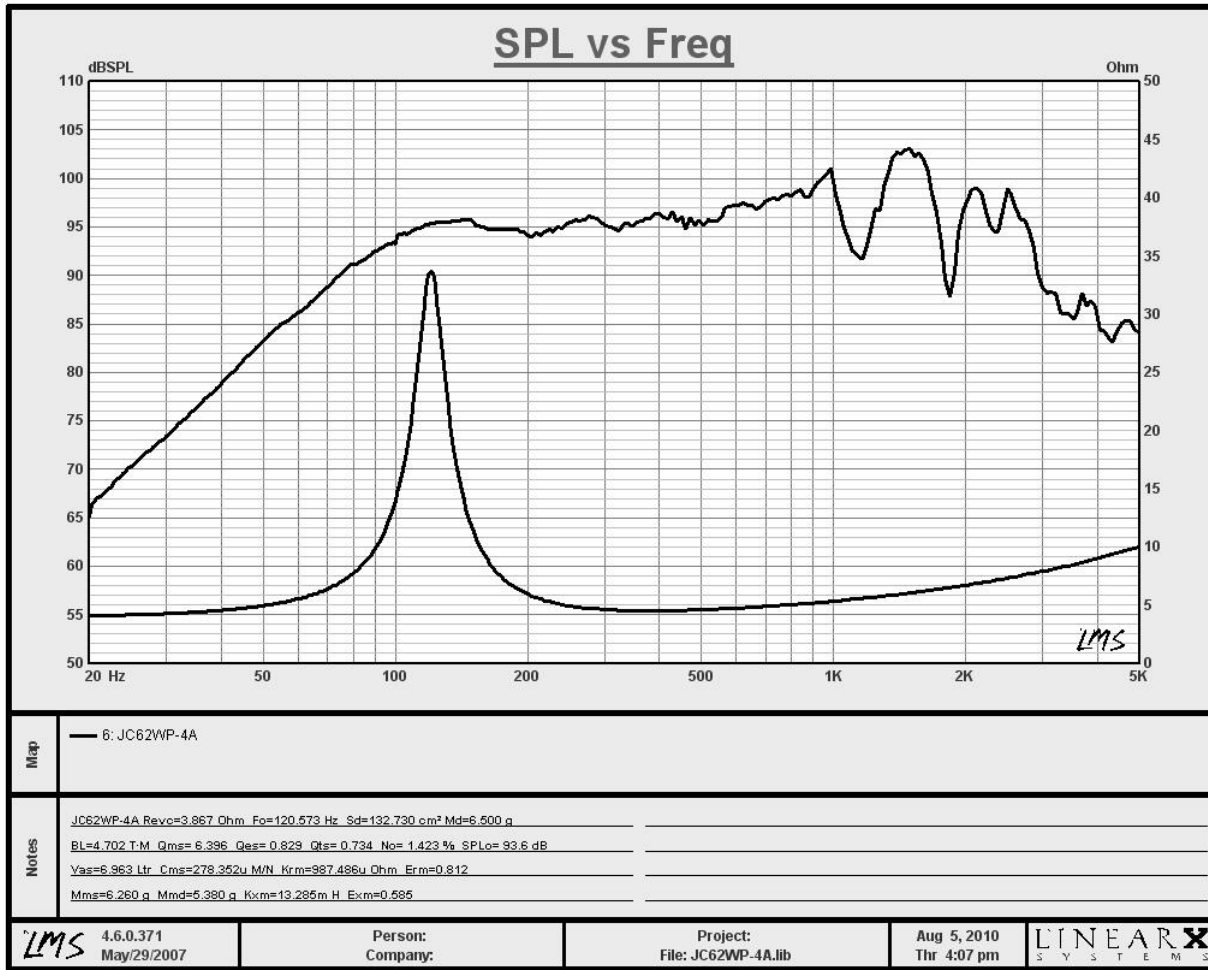

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	6.5 in.	+/- 0.020"
CD	Cutout Diameter	5.7 in.	+/- 0.020"
MG	Magnet Diameter	3.4 in.	+/- 0.050"
HD	Hole Diameter	0.3 in.	+/- 0.010"
MD	Mounting Diameter	6.0 in.	+/- 0.010"
ID	Internal Depth	2.3 in.	+/- 0.025"
FT	Flange Thickness	0.2 in.	+/- 0.050"
NW	Net Weight	881.0 g	

