

Specification Sheet

Model # KC62MB-4B



MISCO®

Key Features:

- 6.5" (165 mm), 4 ohm
- Mid-Woofer, 25 watt
- Ferrite magnet, black talc filled Polypropylene cone with Santoprene rubber surround;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Outdoor
RoHS Compliant	No

Technical Specifications

		Units of Measure
Nominal Basket Diameter	6.5	inch
	165.0	mm
Rated Impedance	4	ohms
Rated Power	25.0	Watts
Program Power	50	Watts
Frequency Range	40 - 5000 Hz	
Sensitivity (2.83 V input measured at 1 Meter)	92	dB SPL
Voice Coil Diameter	1.0 / 25.4 inch / mm	
Magnet Weight	12.0 / 341	oz / gr
Transformer		


Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	57	Hz
D.C. Resistance (Re)	3.5	ohms
Mechanical Q (Qms)	7.9	
Electrical Q (Qes)	0.87	
Total Q (Qts)	0.78	
Compliance Equivalent Volume (Vas)	14.2	ltr
BL Product (BL)	4.3	T-M
Maximum Linear Excursion (Xmax)	4.4	mm
Surface Area of Cone (Sd)	129.0	cm ²
Moving Mass (Mmd)		g

Material Descriptions

Basket	Stamped Steel
Terminal Size	0.205 x 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Kapton
Cone	Black Talc Filled Polypropylene
Cone Edge	Santoprene Rubber
Dust Cap	Cloth

Sensitivity / Frequency

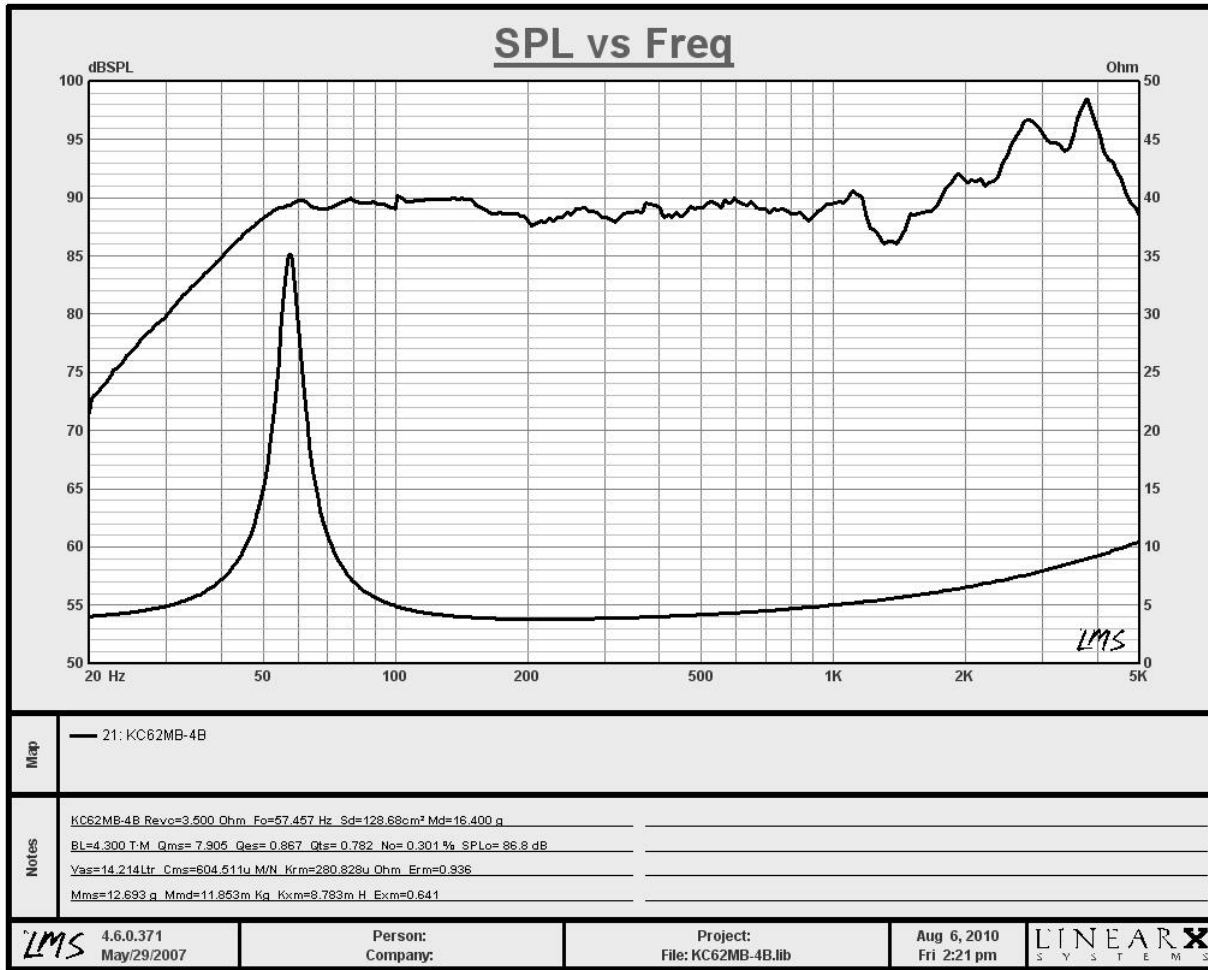

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	6.6 in.	+/- 0.020"
CD	Cutout Diameter	5.6 in.	+/- 0.020"
MG	Magnet Diameter	3.4 in.	+/- 0.050"
HD	Hole Diameter	0.3 in.	+/- 0.010"
MD	Mounting Diameter	6.1 in.	+/- 0.010"
ID	Internal Depth	2.7 in.	+/- 0.025"
FT	Flange Thickness	0.18 in.	+/- 0.050"
NW	Net Weight	1040.0 g	

